


PRODUCT DATA SHEET DS GRV



DS GRV is a pre-lubricated slip ring seal made from elastomers with dense structure for the permanent sealing of concrete and reinforced concrete socket pipe connections.

- DS GRV is in accordance with the requirements of DIN EN 681-1 / DIN 4060 [88] – seals made from elastomers – and the FBS quality guideline.
- DS GRV pipe connections fulfill the criteria of DIN EN 1916, method 1-4.
- DS GRV is a compression slip ring seal. It requires a shoulder or chamber on the spigot end which determines the seat of the profile.
- DS GRV can be supplied in different specific cross sections.
- DS GRV is normally supplied by the pipe manufacturer directly to the job site along with the pipes separately or fixed to the spigot end.
- DS GRV pipe connections resist high shearing forces tested by the FBS quality guideline.

**Tested and quality controlled
by MPA Berlin-Brandenburg.**

SPECIAL ADVANTAGES

- Fast and secure mounting thanks to integrated lubricant.
- Easily repeatedly mounted thanks to closed slide sleeve.
- releases the seal from shear loads through the slide sleeve in the gap between the shoulder and socket.
- supplied loose, at low temperatures it can be separately warmed up.

MATERIAL

DS GRV is produced from ethylene-propylene-diene rubber (EPDM), hardness 40+5 IRHD. The material resists the usual stresses caused by sewage

QR 4060




MPA



DS⁺
DICHTUNGSTECHNIK

PIPE REQUIREMENTS (all dimensions in mm)

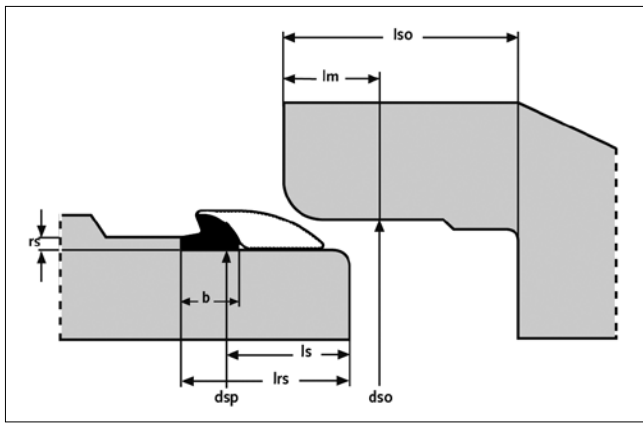

- Concrete and reinforced concrete pipes must comply with the requirements of DIN EN 1916 and DIN V 1201.

By taking appropriate production measures – e.g. use of outer and inner supporting rings – it must be ensured that the limits for the gaps max w and min w laid out in the dimensioning table are met.

Design of the spigot end:

- $rs \geq 0,35 \cdot hj$ (observe FBS-QR!)
- $ls = lrs - 15$;
- $lm = Iso - ls - 10$

Chamber width:

- $> b + 3$
- For chambered sealings the chamber must be large enough to accept the volume of the seal!

DIMENSIONING OF THE SEALING RING


(All dimensions in mm)

For the dimensioning of the necessary seal height hj the socket gap width w has to be determined. To achieve this, the outer diameter of the spigot end dsp and the inner diameter of the socket end must be measured on at least ten pipes of a production batch or delivery. The pipes and the diameters are to be selected according to information gained on site in such a way that the maximum and minimum values are recorded. Max w and min w of the socket gap width are then calculated from the measured values as follows:

$$\max w = \frac{\max dso - \min dsp}{2}$$

$$\min w = \frac{\min dso - \max dsp}{2}$$

The cut length of the sealing ring is to be calculated as follows:

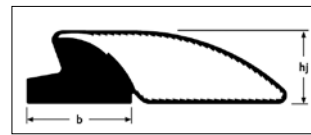

$$l = 2,805 \times (dsp + hj)$$

(deformation 30% – 45%,
pre-stretching $s = 12\%$)

hj	t+	t-	b ± 1,5	max w	min w	w ±	w ±
14	0,6	0,2	21,5	9,0	7,5	8,2	0,8
15	0,6	0,2	23,0	9,7	8,0	8,8	0,8
16	0,6	0,2	24,5	10,3	8,5	9,4	0,9
18	0,6	0,2	27,5	11,6	9,5	10,6	1,0
20	0,6	0,2	30,5	12,9	10,6	11,7	1,2
22	0,8	0,2	33,6	14,2	11,7	13,0	1,3

Smaller or larger hj on request.

PIPE INSTALLATION TIPS

Die DS GRV pipe connections can be installed without any problems using normal construction site equipment. When laying the pipes observe DIN EN 1610 and the DWA-A 139 work sheet.

- Clean the sealing ring, socket and spigot end before installing.
- Mount pre-stretched sealing ring on spigot end and place it next to the shoulder ensuring an even pre-stretching of the sealing ring.
- Move spigot end centrally into socket and pull pipes together.

Values and properties shown in diagrams and tables are not subject to any guarantees. Our warranty is limited to the values and properties as required by the relevant standards. Our literature, data sheets and recommendations represent our knowledge at the time of printing but are in no way legally binding on us. Our "General Conditions of Sale" apply to all sales.

DS⁺
DICHTUNGSTECHNIK