


PRODUCT DATA SHEET

DS BUTYL RUBBER



DS Butyl rubber is a plastic seal for manhole components, small wastewater treatment plants and special profiles such as troughs and covers.

If, due to simple joints, the use of elastomer profiles is not possible tight connections with DS Butyl rubber can be realized.

Due to large amounts of butyl rubber, as well as the excellent adhesiveness, DS Butyl rubber fits to existing geometries, compensates for unevenness of the components and creates the necessary edge joint.

SPECIAL ADVANTAGES

- Provides permanently flexible watertight joints.
- Low to high temperature workability.
- Excellent chemical and mechanical adhesion to clean, dry surfaces.
- Sealed joints will not shrink, harden or oxide upon aging.
- No priming normally necessary. When confronted with difficult installation conditions, such as wet concrete or temperatures below 40F (4C), priming the concrete will improve the bonding action. (Consult DS for the proper primer to meet your application.)

MATERIAL

DS Butylrubber is a wastewater-resistant, plastical sealant. DS Butylrubber is available with different dimensions and cross sections. The version used is dependant on the joint. DS Butyl rubber is not or only limited resistant against solvents (special material is available!).





ASSEMBLY

The bonding surfaces must be clean and dry. In special cases it should be checked whether a primer should be applied to the connection surfaces.


In order to exclude changes in cross-section, the sealing strip is to be placed without material stretching. The strip must be placed against one another by an inclined joint and the connection can be kneaded gently. The protective film is only to be removed until the component assembly

A modification of the original geometry is to be avoided.

For uniform compression of the sealing strip the components are to be assembled centrally. The compression of the seal should be between 30% and 50%. The band thickness must not be less than 10mm thereby.

The sealing tape is not suitable to transfer vertical loads (spacers, mortar joints).

DS Butyl rubber is a plastic seal for manhole components, small wastewater treatment plants and special profiles such as troughs and covers.

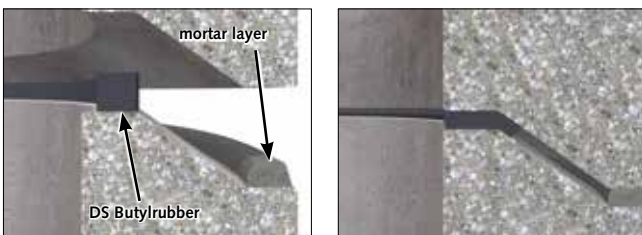

OPERATING TEMPERATURE RANGE

- -12°C bis +48°C

PACKAGING UNIT

Profile		length / roll	roll / box	boxes / palett	weight / box	length/ palett	weight / palett
term.	Form						
13 rund	●	6,4	12	25	13	1.920	324
17 x 17 diamond	◊	3,5	8	25	9	700	222
18 x 18	■	3,5	8	25	13	700	333
20 x 20	■	3,5	8	25	15	700	375
20 rund	●	3,5	8	25	12	700	289
22 x 22	■	3,5	8	25	15	700	385
22 x 44	■	4,5	4	25	18	450	487
30 x 30	■	3	5	25	19	375	450
32 x 38	■	3,35	5	25	24	448,75	588

Values and properties shown in diagrams and tables are not subject to any guarantees. Our warranty is limited to the values and properties as required by the relevant standards. Our literature, data sheets and recommendations represent our knowledge at the time of printing but are in no way legally binding on us. Our "General Conditions of Sale" apply to all sales.